
Suits ECO doors and ATA motor 2280H 24/7 Roller Door Services Selection • Supply • Service Office (03) 6272 0476




Note: Roof noggings must be packed down flush with plaster ceiling - **no gaps.** Floor rebate must be 100mm back from finish opening and 100mm in width from opening. Opening must be one flat surface. Save this sheet to our IBook's now for future reference.

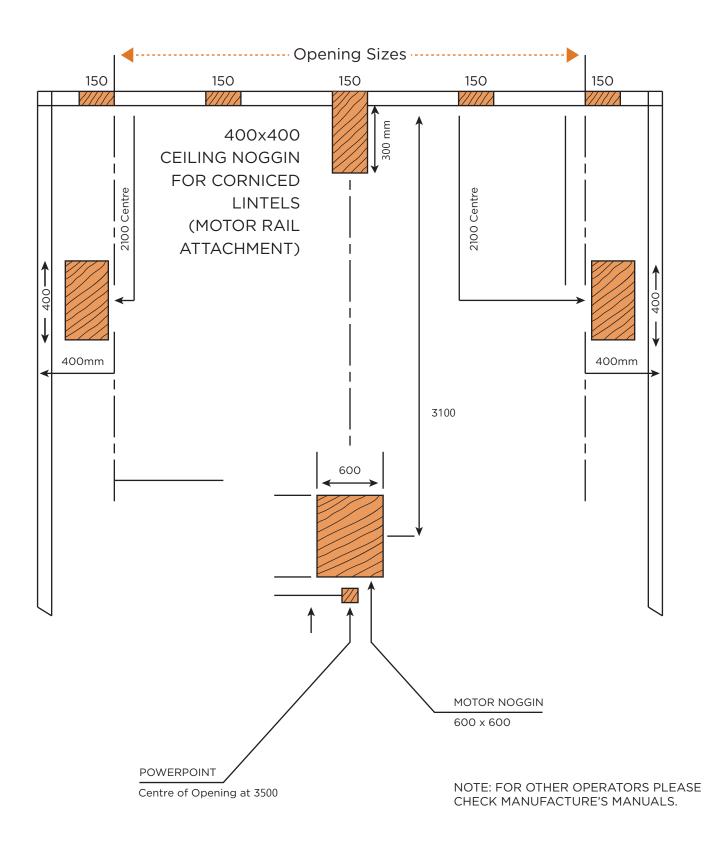


• Please follow diagram for proper installation •

Failure to do so may result in additional cost and delays at your expense

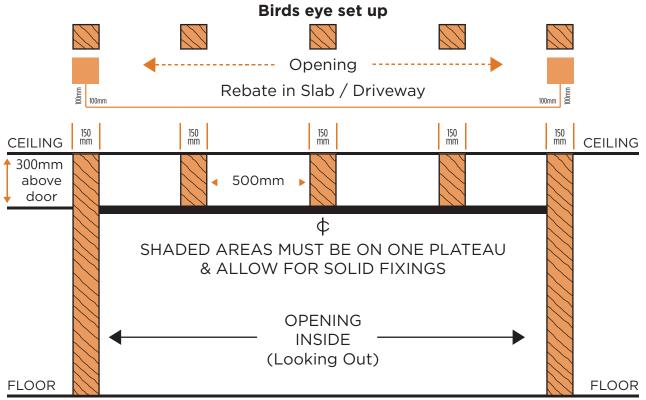

Note: orange sections must be solid fixing - no gaps and must be load bearing.

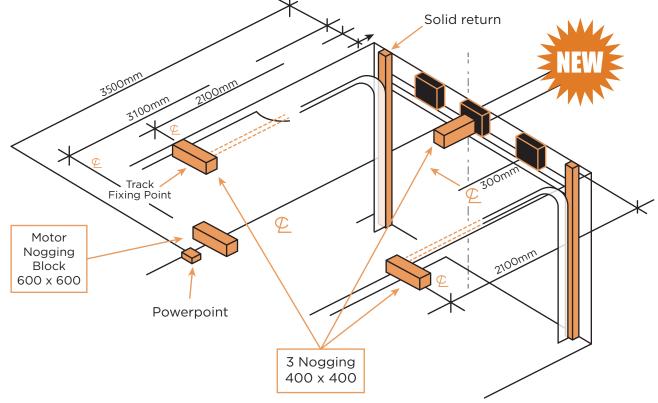

Note: Roof noggings must be packed down flush with plaster ceiling - **no gaps.** Floor rebate must be 100mm back from finish opening and 100mm in width from opening. Opening must be one flat surface. Save this sheet to our IBook's now for future reference.