
Suits ECO doors and motor 2280H

Independent 24/7 Roller Door Services

Selection • Supply • Service Office (03) 6272 0476

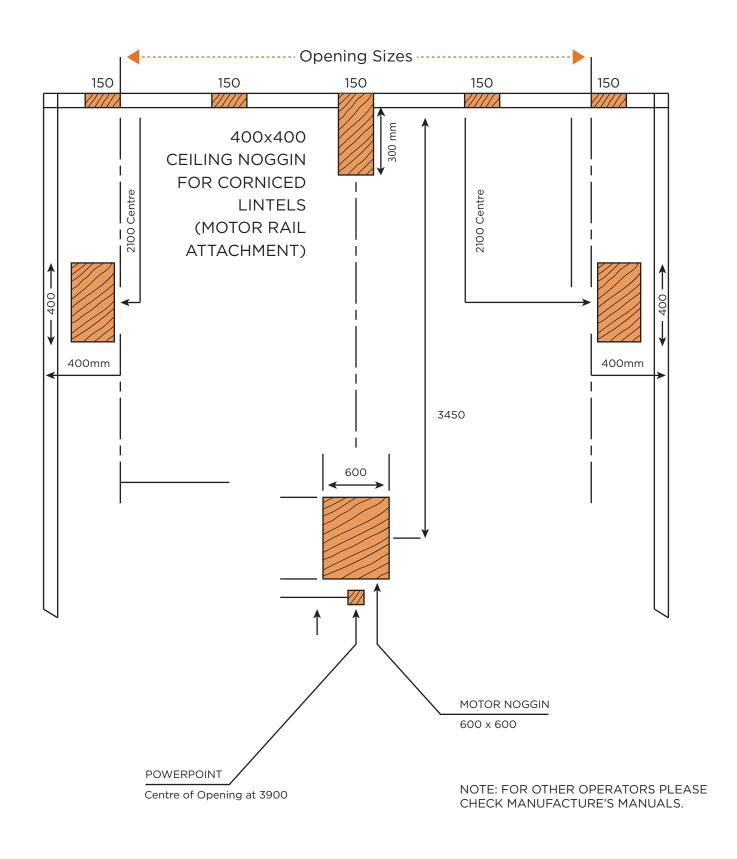


Suits ECO doors and motor 2280H


Independent 24/7 Roller Door Services

Selection • Supply • Service Office (03) 6272 0476

Please follow diagram for proper installation

Failure to do so may result in additional cost and delays at your expense

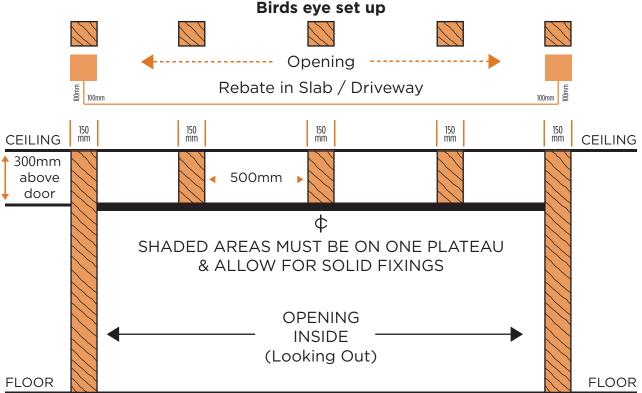

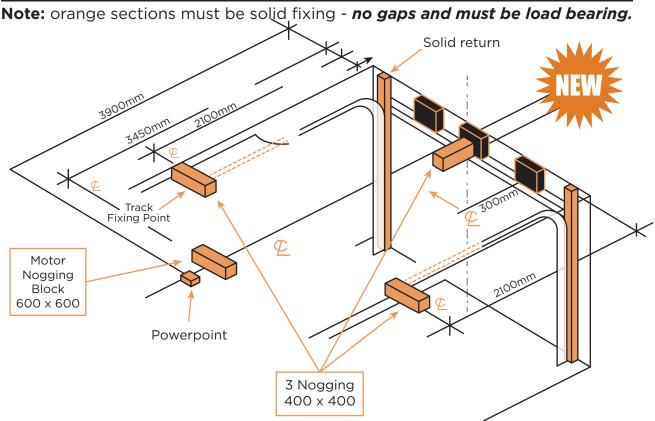

Note: Roof noggings must be packed down flush with plaster ceiling - no gaps. Floor rebate must be 100mm back from finish opening and 100mm in width from opening. Opening must be one flat surface. Save this sheet to our IBook's now for future reference.